

RGB+CCT LED Underground Light (Subordinate Lamp)

Model No.: SYS-RD1 / SYS-RD2

This product has to be connected to "SYS-T1 Controller" to fulfill the remote controlling.

Features

The housing is made of die-cast aluminum and stainless steel; The lens is with high transmittance PC; light color is smooth, no diffused lighting and shadow. We adopt silicone seal protection; waterproof rate is IP68. Connecting with "SYS-T1 controller", you can wireless control the 16 millions color, color temperature, brightness and saturation. Widely used on plaza, park, garden and fountain, etc.



RGB+CCT
16 Millions of colors to choose



Dim brightness/
Saturation



Color temperature
2700K~6500K



Waterproof and dustproof
grade IP68

Dynamic Mode Sheet

Number	Dynamic Mode	Brightness&Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

Parameters

5W RGB+CCT LED Underground Light (Subordinate Lamp)

Model No.: SYS-RD1

Input Voltage: DC24V

Power: 5W

Working Temperature: -20~60°C

Color temperature: 2700K~6500K

Luminous Flux: 350LM

Light Efficiency: 70LM/W

CRI: >80


Lifespan: 50000h

Beam Angle: 30°

IP Rate: IP68


Product Weight: 440g

Housing Material: Aluminum+stainless steel




9W RGB+CCT LED Underground Light (Subordinate Lamp)

Model No.: SYS-RD2
 Input Voltage: DC24V
 Power: 9W
 Working Temperature: -20~60°C
 Color temperature: 2700K~6500K
 Luminous Flux: 700LM
 Light Efficiency: 80LM/W
 CRI: >80
 Lifespan: 50000h
 Beam Angle: 15°
 IP Rate: IP68
 Product Weight: 950g
 Housing Material: Aluminum+stainless steel



Connection Diagram



Note: The "SYS-T1 Controller" has to be purchased separately.

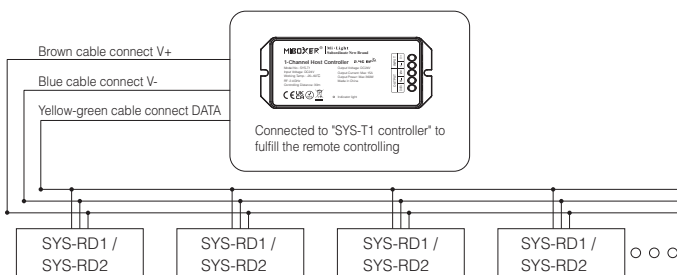

Note: When using "SYS-T1 controller", you need to add "SYS-T2 1-channel signal amplifier" for below 3 situations.

1. Connecting over 50pcs lights.
2. Connected cable length over 300m.
3. Output power over (SYS-T1: 360W).

Input: DC24V



Attention

1. Please check whether the input voltage is in accordance with the lighting working voltage, and please check the connection of both the cathode and anode.
2. The working Voltage is DC24V, the lighting will be damage if the voltage is higher than 24V.
3. Non-professional user cannot dismantle the controller directly, Otherwise it may damage the light.



Made in China