

# Technický list produktu

LED panely BLP6060; BLP30120



BLP6060





BLP30120



## Rozměry (mm)


|   | BLP6060 | BLP30120 |
|---|---------|----------|
| A | 595mm   | 1195mm   |
| B | 595mm   | 295mm    |
| C | 595mm   | 1195mm   |
| D | 30mm    | 30mm     |

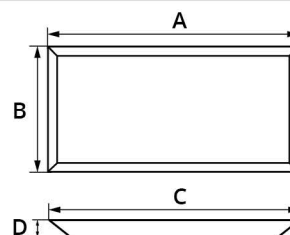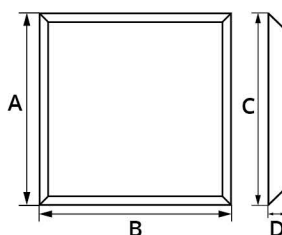

| Název produktu     | Objednací kód (ID) | Příkon (W) | Barevná teplota (K)                         | Světelný tok (lm) | Váha (kg) |
|--------------------|--------------------|------------|---|-------------------|-----------|
| BLP6060 LED PANEL  | 102301             | 40W        | 3000K <span style="color: yellow;">■</span> | 4300lm            | 1,7kg     |
| BLP6060 LED PANEL  | 102302             | 40W        | 4000K <span style="color: orange;">■</span> | 4350lm            | 1,7kg     |
| BLP6060 LED PANEL  | 102303             | 40W        | 6000K <span style="color: white;">■</span>  | 4400lm            | 1,7kg     |
| BLP30120 LED PANEL | 102310             | 40W        | 3000K <span style="color: yellow;">■</span> | 4300lm            | 1,87kg    |
| BLP30120 LED PANEL | 102311             | 40W        | 4000K <span style="color: orange;">■</span> | 4350lm            | 1,87kg    |
| BLP30120 LED PANEL | 102312             | 40W        | 6000K <span style="color: white;">■</span>  | 4400lm            | 1,87kg    |

## Parametry svítidla

|                                      |                          |
|--------------------------------------|--------------------------|
| Vstupní napětí                       | Externí LED driver 230V  |
| Barva rámečku                        | Bílá                     |
| Nestmívatelný zdroj (součást balení) | 25-40VDC 1000mA          |
| Účinnost                             | 0,95                     |
| Životnost                            | až 50 000h               |
| CRI                                  | >80                      |
| Úhel svitu                           | 170°                     |
| LED čip                              | Epistar                  |
| Provozní teplota                     | -15°C až max. 60°C       |
| Krytí                                | IP20                     |
| Stupeň mechanické odolnosti          | IK07                     |
| Stmívatelné                          | Ne, po výměně zdroje ano |

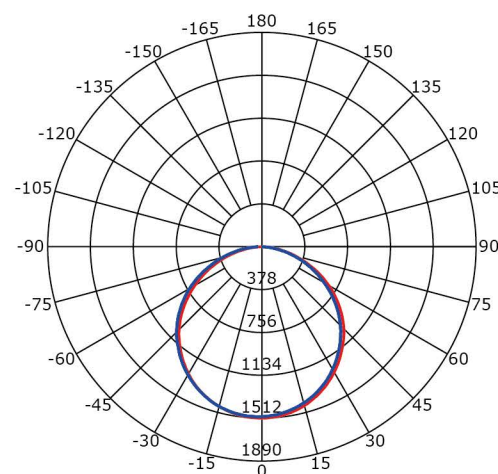

Beam Angle(50%) C0-180,C90-270: 114.0 deg,114.6 deg

C0-180 — C90-270 —