


Technický list produktu

Průmyslové LED svítidlo UFO HL5




HL5-UFO-100W

HL5-UFO-150W

HL5-UFO-200W

Rozměry

HL5-UFO100W	HL5-UFO150W	HL5-UFO200W
a 150mm	150mm	153mm
b 113mm	113mm	116mm
c 52mm	52mm	55mm
d 258mm	299mm	347mm

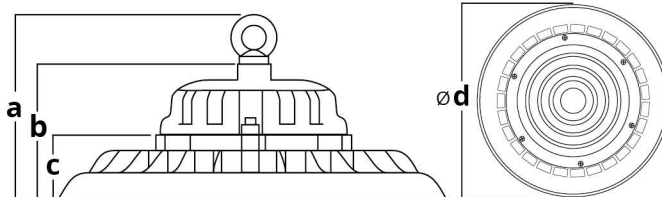

Název produktu	Objednací kód (ID)	Příkon (W)	Barevná teplota (K)	Světelný tok (lm)	Váha (kg)
HL5-UFO-100W	107250	100W	4000K	14000lm	2,2kg
HL5-UFO-100W	107251	100W	6500K	14500lm	2,2kg
HL5-UFO-150W	107252	150W	4000K	20500lm	3,1kg
HL5-UFO-150W	107253	150W	6500K	21000lm	3,1kg
HL5-UFO-200W	107254	200W	4000K	27000lm	4kg
HL5-UFO-200W	107255	200W	6500K	28000lm	4kg

Přepínač výkonu (100%, 80%, 60%)

Model	High	Mid	Low
HL5-UFO-100W	100W	80W	60W
HL5-UFO-150W	150W	120W	90W
HL5-UFO-200W	200W	160W	120W



Parametry svítidla

Vstupní napětí	176-305V AC
Účinnost	>95%
CRI	>80
Úhel svitu	90°
LED čip	2835
Provozní teplota	-20°C až max. 45°C
Krytí	IP65
Stmívatelné	Ne
Přepětová ochrana	4kV a SMD pojistka
Záruka	60 měsíců

